

# RUBI 403VAC-6

<b>Glass entrance:</b> <i>Entrada del vidrio:</i>	<b>Widewise</b> <i>Transversal</i>
<b>Loading system:</b> <i>Sistema de carga:</i>	<b>Vacuum/Automatic</b> <i>Ventosas/Automática</i>
<b>Positioning system:</b> <i>Sistema de posicionamiento:</i>	<b>Belts</b> <i>Autónoma</i>
<b>Evacuation:</b> <i>Evacuación:</i>	<b>Automatic</b> <i>Automática</i>
<b>Maximum cutting width:</b> <i>Corte útil máximo:</i>	<b>3700 x 2600 mm</b> <b>(146" x 103")*</b>

**Special features:**  
*Características especiales:*




\*The RUBI 403VAC-6 offers the possibility to upgrade the maximum cutting width to 6100 x 3300 mm (241" x 130").  
\*La RUBI 403VAC-6 ofrece la posibilidad de ampliar el corte útil a 6100 x 3300 mm (241" x 130")


<b>Maximum transport load:</b> <i>Capacidad del sistema de transporte:</i>	<b>1200 kg</b>
<b>Weight:</b> <i>Peso:</i>	<b>6300 kg</b>
<b>Power consumption:</b> <i>Consumo:</i>	<b>11 kW</b>
<b>Air consumption:</b> <i>Consumo de aire:</i>	<b>10 l/min</b>



**Common layouts:**  
*Distribuciones habituales:*

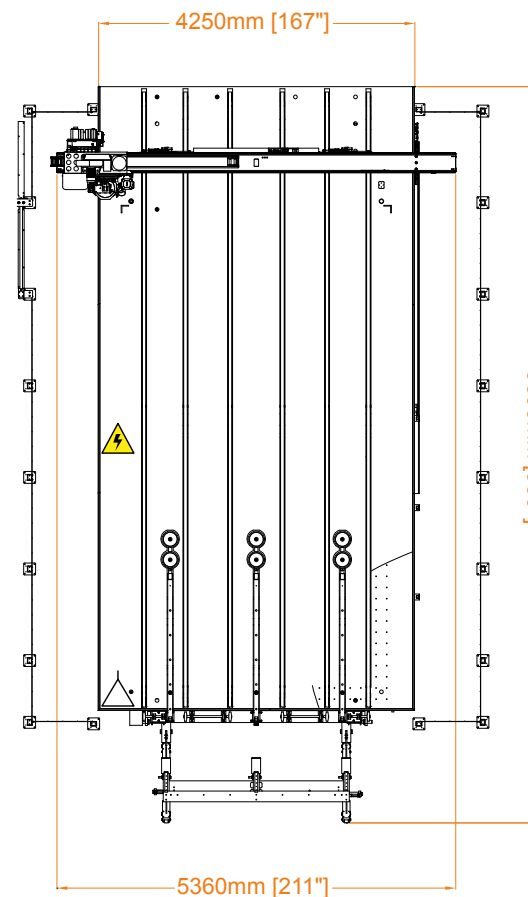

DISTRIBUTION 5: RUBI 403VAC-6

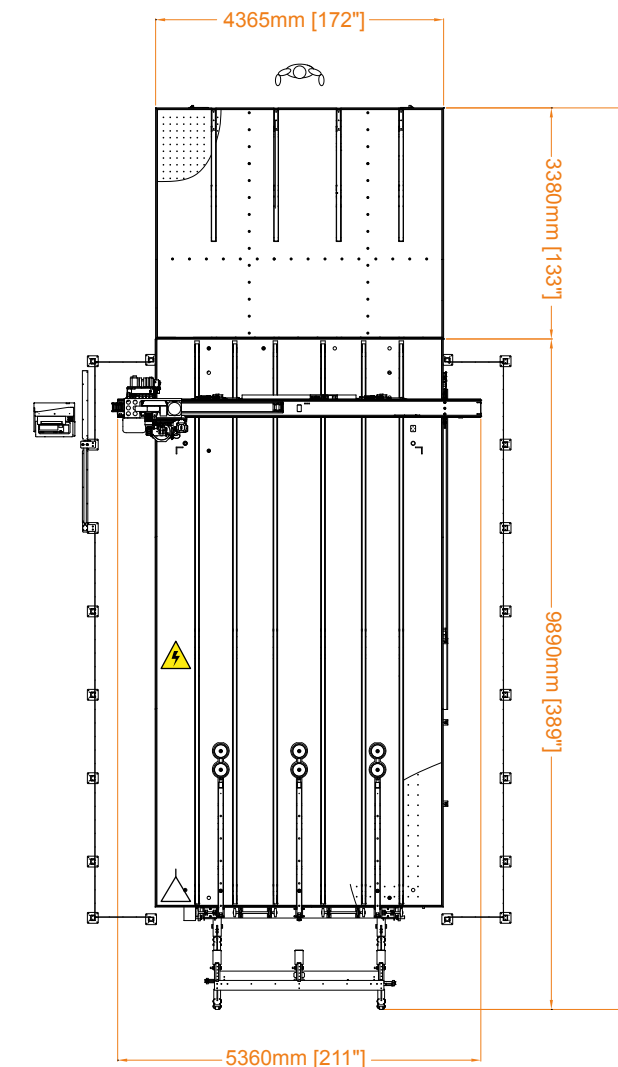

DISTRIBUTION 6: RUBI 403VAC-6 + MT-300B